

SonicWall Switch

High-speed Network Switching for Business Connectivity

The SonicWall Switch delivers high-speed network switching while providing unparalleled performance and manageability through SonicWall firewalls or Wireless Network Manager. It features a unified security posture, high port density, Power over Ethernet (PoE) options, and gigabit or 10 gigabit performance capabilities. New capabilities such as SNMP monitoring and backup and restore of Switch configurations make it ideal for small- and medium-sized businesses (SMB) and Software-Defined Branch (SD-Branch) deployments. This enables businesses - big or small - to accelerate digital transformation and keep pace with the changing network and security landscape.



[View full specs »](#)

HIGHLIGHTS

- SD-Branch ready
- Firewall, WNM, StandAlone UI, and CLI management
- SNMP monitoring
- Backup and restore Switch configurations
- Zero-Touch Deployment
- Unified security posture
- Layer 2 switching
- 10 gigabit or 1 gigabit support
- 8/10/24/48 port models
- Various PoE options
- QoS support
- Segmentation and compliance
- Compact form factor
- Energy-efficient design
- 802.1X and MAB
- Static Routing
- Time Management Options for PoE Switch Ports

**Find the right SonicWall solution
for your small business and
branch deployments:**

sonicwall.com/switch

The SonicWall Secure SD-Branch solution transforms user experience at branch office locations by delivering a unified platform that enables branches to be deployed in minutes. It delivers unified visibility and threat detection from a single pane of glass. SonicWall SD-Branch components consist of SonicWall next-generation firewalls with Secure SD-WAN, Capture Security Center with Zero-Touch Deployment, SonicWall Switches, SonicWave access points (AP), Capture Client and Cloud App Security. With the flexibility that SonicWall Secure SD-Branch offers, organizations can now be more agile, open and cloud-centric.

An integral part of the next-generation branch transformation, the SonicWall Switches are managed via firewalls or Wireless Network Manager (WNM) for unified, single-pane-of-glass management. Not all features available on the standalone switch UI will be available from the Firewall or WNM Management solution. Refer to the Firewall and WNM documentation for supported features. By tightly integrating with SonicWall firewalls and SonicWave Access Points, the solution benefits from a unified security posture and offers an end-to-end security solution that simplifies deployment, management and troubleshooting. This ensures seamless security and eliminates gap in the security posture that may arise with third party switches.

In conjunction, the SonicWall Switch offers Zero-Touch Deployment capability with the ability to quickly roll out devices across branches spread out globally. Admins can quickly and securely deploy these switches at new locations without requiring costly on-site IT personnel.

Packed with features, these switches are available in a compact form factor with an energy-efficient design. Available in seven models, ranging from 8 to 48 ports, with

PARTNER-ENABLED SERVICES

Need help to plan, deploy or optimize your SonicWall solution? SonicWall Advanced Services Partners are trained to provide you with world-class professional services. Learn more at:

www.sonicwall.com/PES

gigabit and 10 gigabit Ethernet ports, the switches work seamlessly with SonicWall next-generation firewalls and SonicWave APs to create a high performance secure network. The Ethernet ports provide PoE options to power on various devices such as APs, VOIP phones and IP cameras. Time Management Options for PoE switch ports enhance energy optimization.

Organizations can prioritize certain traffic on the network such as VOIP for video conferences while working from home, with features such as QoS. Devices can be easily segmented in the network to maintain compliance. Segregating can be accomplished by creating policies or VLANs. Features such as 802.1X authentication allow businesses to maintain PCI compliance.

MAB (MAC authentication bypass) is a crucial security feature, particularly for devices like Cameras, Printers, and IoT devices that lack compatibility with 802.1x authentication. This ensures robust switch port security, even in instances where traditional authentication methods are not applicable.




SonicWall Switch


SWS12-8




SWS12-8POE

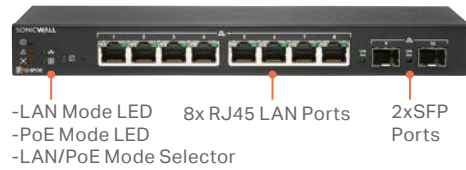


SWS12-10FPOE

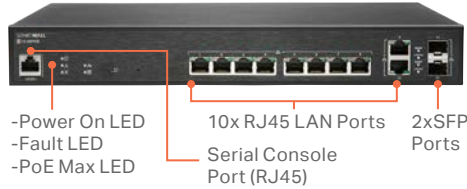

SWS14-24




SWS14-24FPOE

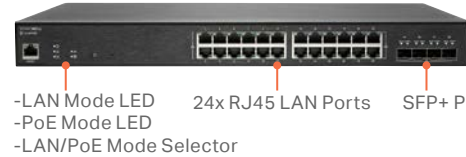

SWS14-48



SWS14-48FPOE

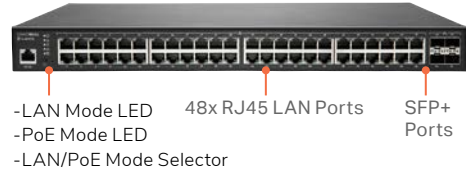

| Model | Number of Gigabit Ethernet Ports | Number of SFP/SFP+ Ports | PoE Version |
|--------------|----------------------------------|--------------------------|-------------|
| SWS12-8 | 8 | 2 SFP | Non-PoE |
| SWS12-8POE | 8 | 2 SFP | 802.3af |
| SWS12-10FPOE | 10 | 2 SFP | 802.3at |
| SWS14-24 | 24 | 4 SFP+ | Non-PoE |
| SWS14-24FPOE | 24 | 4 SFP+ | 802.3at |
| SWS14-48 | 48 | 4 SFP+ | Non-PoE |
| SWS14-48FPOE | 48 | 4 SFP+ | 802.3at |

Specifications

| Hardware | SWS12-8 | SWS12-8POE | SWS12-10FPOE | SWS14-24 | SWS14-24FPOE | SWS14-48 | SWS14-48FPOE |
|-------------------------------------|---|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 1G Cu | 8 | 8 | 10 | 24 | 24 | 48 | 48 |
| 1G SFP | 2 | 2 | 2 | - | - | - | - |
| 10G SFP+ | - | - | - | 4 | 4 | 4 | 4 |
| Total Interfaces | 10 | 10 | 12 | 28 | 28 | 52 | 52 |
| Memory (MB) | 256 | 256 | 256 | 512 | 512 | 512 | 512 |
| Flash (MB) | 32 | 32 | 32 | 128 | 128 | 128 | 128 |
| Packet Buf. | 512K | 512K | 512K | 1.5M | 1.5M | 2M | 2M |
| Mac Table | 8K | 8K | 8K | 32K | 32K | 32K | 32K |
| Switching (Gbps) | 20 | 20 | 24 | 128 | 128 | 176 | 176 |
| Fan | - | - | 1 | - | 2 | 1 | 3 |
| PoE Standard | - | 802.3af | 802.3af/at | - | 802.3af/at | - | 802.3af/at |
| PoE Power (Watts) | - | 55 | 130 | - | 410 | - | 740 |
| Power Supply | 24W Power Adapter | 65W Power Adapter | 180W Fixed | 25W Fixed | 480W Fixed | 60W Fixed | 900W Fixed |
| Power Source | 12VDC Power Adapter | 54VDC Power Adapter | 100-240VAC 50-60Hz | 100-240VAC 50-60Hz | 100-240VAC 50-60Hz | 100-240VAC 50-60Hz | 100-240VAC 50-60Hz |
| Power Consumption (Maximum) | 5.7W | 63.2W | 152.8W | 24.4W | 500.4W | 44W | 885W |
| Current | 2.0A | 1.2A | 2.5A | 0.7A | 7.0A | 1.5A | 12.0A |
| Heat Dissipation (BTU) | 19.4 | 249.5 | 521.1 | 122.8 | 1706.4 | 184.2 | 1807.3 |
| Min Power Cord Amperage* | 10 Amp | 10 Amp | 10 Amp | 10 Amp | 10 Amp | 10 Amp | 12 Amp |
| Operating Temperature | 0 - 40°C | 0 - 40°C | 0 - 40°C | 0 - 40°C | 0 - 40°C | 0 - 40°C | 0 - 40°C |
| Storage Temperature | -40 - 70°C | -40 - 70°C | -40 - 70°C | -40 - 70°C | -40 - 70°C | -40 - 70°C | -40 - 70°C |
| Humidity | 10-95% R.H | 10-95% R.H | 10-95% R.H | 10-95% R.H | 10-95% R.H | 10-95% R.H | 10-95% R.H |
| Dimensions (W x D x H) | 240 x 105 x 27mm | 240 x 105 x 27mm | 330 x 230 x 44mm | 440 x 200 x 44mm | 440 x 260 x 44mm | 440 x 260 x 44mm | 440 x 310 x 44mm |
| Weight | 0.62 Kg | 0.64 Kg | 2.5 Kg | 1.8 Kg | 3.9 Kg | 3.2 Kg | 4.8 Kg |
| RJ-45 Serial Console Port | - | - | 1 | 1 | 1 | 1 | 1 |
| Form Factor | Desktop | Desktop | Desktop | 1U | 1U | 1U | 1U |
| MTBF @25°C in Hours | 1,387,712 | 548,553 | 180,837 | 1,273,866 | 157,763 | 222,974 | 100,645 |
| MTBF @25°C in Years | 158 | 62 | 20 | 145 | 18 | 25 | 11 |
| Switching Capacity (Duplex) in Gbps | 20 | 20 | 24 | 128 | 128 | 176 | 176 |
| VLANs | 4096 | 4096 | 4096 | 4096 | 4096 | 4096 | 4096 |
| Regulatory Model | APL51-0E1 | APL52-0E2 | 1RK43-0E3 | 1RK44-0E4 | 1RK45-0E5 | 1RK46-0E6 | 1RK47-0E7 |
| Regulatory Approvals | FCC Class A, ICES Class A, CE (EMC Class A, LVD, RoHS), C-Tick, VCCI Class A, UL cUL, , CB, Mexico UL DGN notification, WEEE, REACH, BSMI, KCC/MSIP, ANATEL | | | | | | |

* Please check with your local sales team or resellers to ensure you use the right power cord

Switch Series Features - Across All Models

Management and Configuration

- Manage through Capture Security Center via Network Security Manager (NSM) or Wireless Network manager (WNM)*
- SNMP monitoring
- Backup and restore Switch configurations
- Switch auto-discovery
- Daisy chaining via firewalls
- Software upgrade of Switches (from firewall) or Wireless Network Manager
- Centralized VLAN configuration
- Static/Dynamic LAG
- STP
- LLDP/MED
- Static routing
- IPv4 management
- SSH
- Firewall management, standard CLI and web GUI interface
- Software upgrade/downgrade via TFTP/firewall/GUI
- IGMP Snooping

- Time Management Options for PoE Switch Ports

Security and Visibility

- MAB (MAC authentication bypass)
- DHCP Snooping
- 802.1x authentication
- Syslog collection
- IP/MAC ACL
- ACL
- IEEE 802.1x authentication port-based
- IEEE 802.1x guest and fallback VLAN

Firewall Features Enforced on Management Firewall

- IPS, GAV, Application Control, Botnet

Layer 2

- Jumbo frames
- Auto-negotiation for port speed and duplex
- MDI/MDIX auto-crossover
- MAC bridging/STP
- Rapid Spanning Tree Protocol (RSTP)
- Multiple Spanning Tree Protocol (MSTP)

- VLAN tagging
- Guest VLAN and voice VLAN
- Unicast/Multicast traffic balance over trunking port
- Flow control and back-pressure
- 10Base-T
- 100Base-TX
- 1000Base-SX/LX
- 1000Base-T
- Gigabit ethernet support
- 10 gigabit ethernet (available on 24 and 48-port models only)
- Ingress/Egress Bandwidth control
- CSMA/CD access method and physical layer specifications
- Storm control
- MAC, IP, ethertype-based VLANs
- Generic VLAN Registration Protocol (GVRP)
- Cable diagnostics

Quality of Service

- IEEE 802.1p based priority queuing
- IP TOS/DSCP based priority queuing

* Available with additional license

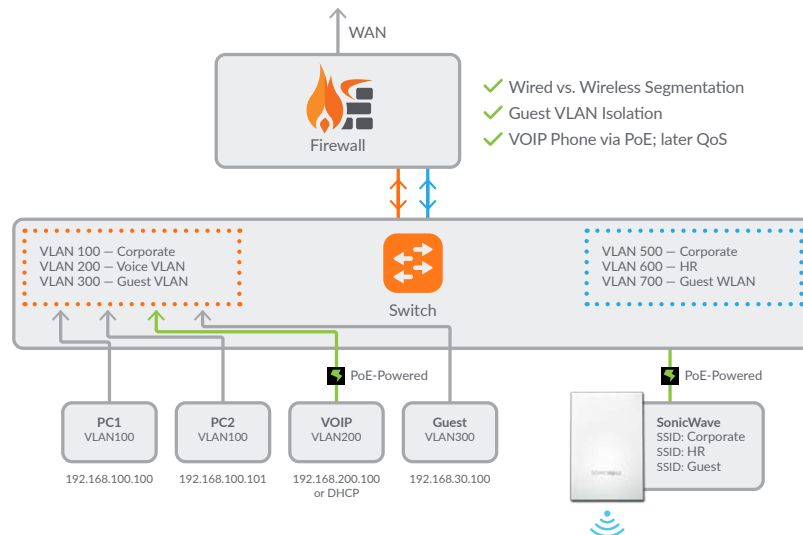


Figure 1. Firewall-Managed Switch

Wireless Network Manager

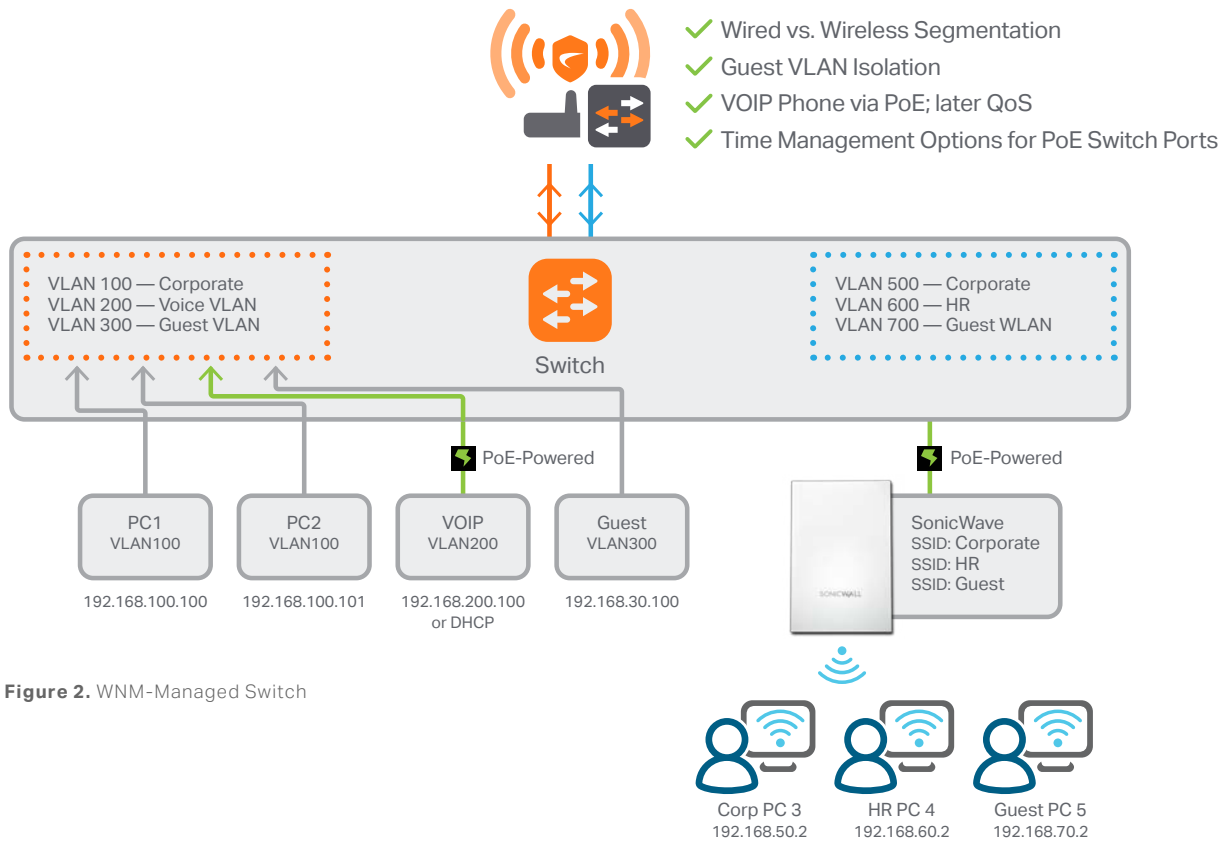


Figure 2. WNM-Managed Switch

To learn how you can obtain a unified security posture for your business, visit:

SonicWall Switch Series

About SonicWall

[SonicWall](#) is a cybersecurity forerunner with more than 30 years of expertise and a relentless focus on its partners. With the ability to build, scale and manage security across the cloud, hybrid and traditional environments in real time, SonicWall can quickly and economically provide purpose-built security solutions to any organization around the world. Based on data from its own threat research center, SonicWall delivers seamless protection against the most evasive cyberattacks and supplies actionable threat intelligence to partners, customers and the cybersecurity community.



SonicWall, Inc.
1033 McCarthy Boulevard | Milpitas, CA 95035
Refer to our website for additional information.
www.sonicwall.com

SONICWALL®

© 2024 SonicWall Inc. ALL RIGHTS RESERVED.

SonicWall is a trademark or registered trademark of SonicWall Inc. and/or its affiliates in the U.S.A. and/or other countries. All other trademarks and registered trademarks are property of their respective owners. The information in this document is provided in connection with SonicWall Inc. and/or its affiliates' products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of SonicWall products. Except as set forth in the terms and conditions as specified in the license agreement for this product, SonicWall and/or its affiliates assume no liability whatsoever and disclaims any express, implied or statutory warranty relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or non-infringement. In no event shall SonicWall and/or its affiliates be liable for any direct, indirect, consequential, punitive, special or incidental damages (including, without limitation, damages for loss of profits, business interruption or loss of information) arising out of the use or inability to use this document, even if SonicWall and/or its affiliates have been advised of the possibility of such damages. SonicWall and/or its affiliates make no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. SonicWall Inc. and/or its affiliates do not make any commitment to update the information contained in this document.